



Heavy Commercial Upholstery

SYNERGY

PRISMA
FAUX LEATHER OPTIONS

SYNERGY

**FAUX LEATHER PVC
Heavy Commercial Upholstery**

SYNERGY is our new odour and phthalate free PVC faux leather in 16 popular commercial colours tested to heavy commercial upholstery standards. **SYNERGY** is a perfect colour companion to **BEACON** - a sophisticated **KAVLON**, **PRET** & **SHRUGS** branded easy clean fabric woven to heavy commercial upholstery standards using inherently stain-resistant polyester yarns together with recycled polyester yarns retrieved from post consumer plastic bottles.

SPECIFICATIONS

Composition: 100% PVC – Odour and Phthalate free.

Weight: 730 gsm

Width: 140 cm

Usage: Heavy Commercial-150,000 Martindale Cycles



High Durability



Liquid Resistant
PFC Free



Stain Resistant
PFC Free



Bleach Clean



Pet Friendly



Odour Free



Phthalate Free



Sustainability



Fire rated

APPLICATIONS



Residential



Workplace Commercial



Education



Healthcare



Hospitality



Food service



Senior Living

CARE INSTRUCTIONS For General & Spot Cleaning refer to detailed Fabric Care Label.



Bleach Cleanable



Do not wash




Do not tumble dry

PRISMA
FAUX LEATHER OPTIONS



SYNERGY FAUX LEATHER PVC Heavy Commercial Upholstery

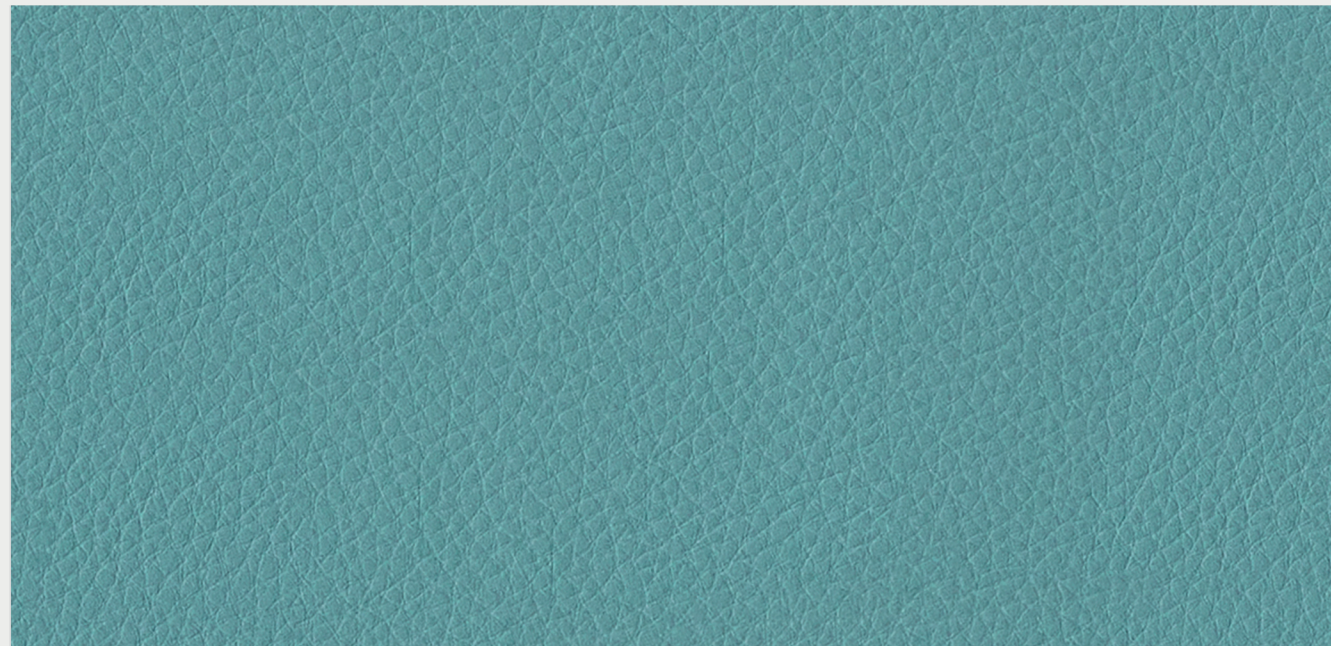

Synergy Vanilla



Synergy Alaska



Synergy Moonrock




Synergy Kangaroo



Synergy Silver



Synergy Castlerock

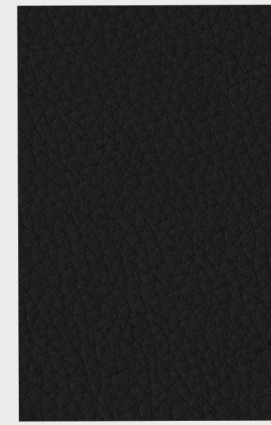

Synergy Caviar



Synergy Tan



Synergy Honey



Synergy Marsala



Synergy Aqua




Synergy Peacock




Synergy Celadon



Synergy Evergreen

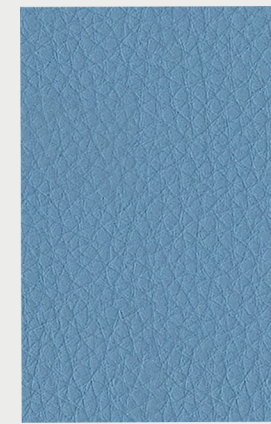

Synergy Powder Blue

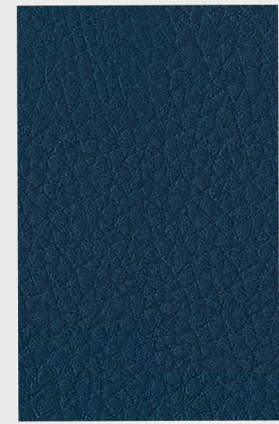

Synergy Royal

RANGE NAME	SYNERGY
PRODUCT BRAND	PRISMA-FAUX LEATHER PVC
DESCRIPTION	Faux Leather PVC Odour Free, Phthalate Free, Low VOC's
PERFORMANCE	HEAVY COMMERCIAL
APPLICATION	Upholstery, Commercial
COMPOSITION	100% PVC Face W/- Doubleknit Polyester Backing.
WIDTH	140cm
WEIGHT	730gsm
PATTERN REPEAT	PLAIN
CARE LABEL	PVC
STAIN RESISTANT	Wipe Clean-PFC FREE
WARRANTY	5 YEARS* (in accordance with care instructions)

TEST STANDARDS	TEST RESULTS
Martindale Abrasion ISO 12947	150,000 Cycles
Wyzenbeek Abrasion AS2001.2.30	100,000 Double Rubs
Seam slippage(mm) ISO 13936-2	Warp - 02.5 Weft - 3.3
Colour fastness to light Xenon arc (is0 105-B02, blue std 6)	5
Colour fastness to rubbing ISO 105-X12:1993	Dry-5 Wet-5 (Min 4)
Colour fastness to perspiration, alkaline ISO 105-E04	Colour Change - 5 (min 4) Staining Multifibre - 5 (min 4)
Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Colourfastness to bleaching -Hypochlorite AS2001.4 11-1982 5% Solution 40g/L Sodium Hypochlorite	Colour change 5 (after 5 Bleach Cleans)
Resistance to Flexing -AS4878.9 Mtd B (requirement - no cracking > 15,000 cycles)	No Cracking of PVC layer after 400,000 Cycles in Length & Width
FLAMMABILITY-AS/NZS 1530.3-1999	
Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	6
Quality Management System ISO 9001	YES

